



Q-Lux™

Revealing a better way

Waterproof LED Utility Light Fixture

Part Numbers

Assembled:

Q-Lux Fixture w/ Hub, 5000K QXH1205C
Q-Lux Fixture w/ Hub, 2700K..... QXH1202C

Parts:

Q-Hub w/ & w/o screwQH1000S, QH1000
Q-Lux Subassembly, 5000K.....QX1205C
Q-Lux Subassembly, 2700K.....QX1202C


Application:

Built with the agricultural barn electrical installer in mind, the Q-Hub's revolutionary features save installers time combined with the most watertight and rugged utility LED fixture available today - perfect for new barn construction. Q-Lux is designed for the barn. It assembles four times faster to the Q-Hub with no assembly screws. A simple twist & lock, and its water and dust tight!

Features:

- Intended for pressure washing/cleaning, IP69K
- No assembly screws
- FicientLock™ System
- Dimmable with traditional dimmers
- Integrated surge protection
- 54,000 hour life at 60°/140°F

FicientLock™ Technology

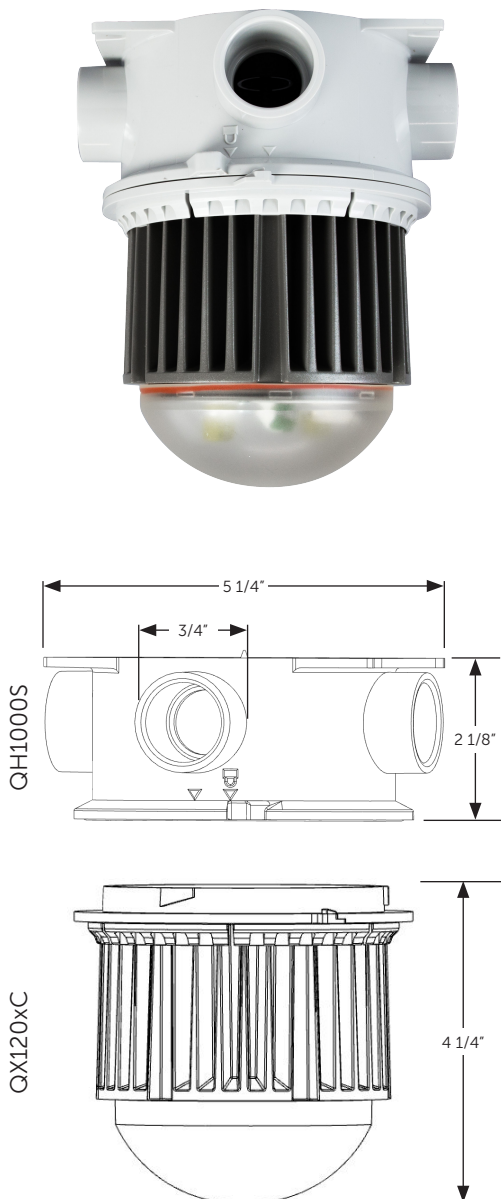

Q-Lux
#QX1205C
#QX1202C



Q-Hub
#QH1000(S)



Q-Lux Fixture
#QXH120xC

"Twist, Lock, and It's Water Tight!"

Wattage	11.7 Watts
Light Output	1200 Lumens through the lens, 5000K or 2700K
Optics	180°+ Wide beam distribution, low glare, polycarbonate lens
Environmental	Suitable for damp or wet locations, high pressure washable up to 1450 PSI, 80°C/176°F, IP69K rated
Safety	ETL listed, Conforms to UL Std. 1598, Certified to CAN/CSA C22.2 #250.0
Dimensions	6.375" H x 5.25" W
Lifetime	54,000 hours to L70 at 60°C/140°F
Ambient Conditions	-40°C/-40°F to 60°C/140°F, damp, wet, and hose down areas
Electrical	120V AC, 60Hz, 11.7W, line voltage dim to zero with most triac dimmers
Packaging	QXH120xC: 12 per box; Box Size: 23.75" x 18.75" x 10"; Weight: 25 lbs
Warranty	5 years



Scan QR
code for
more info



USA Made